



SKJERVEN
MORRILL
MACPHERSON
FRANKLIN
& FRIEL LLP

1-28-00

A

Docket No.: M-8284 US

January 25, 2000

Box Patent Application
Assistant Commissioner for Patents
Washington, D. C. 20231

Enclosed herewith for filing is a patent application, as follows:

Inventor(s): John O. Ryan, James R. Holzgrafe and Mark A. Hollar

Title: Method And Appartus For Carrying Data With A Video Signal So That The Data Is Not Recorded

- ☒ X Return Receipt Postcard
- ☒ X This Transmittal Letter (in duplicate)
- 15 page(s) Specification (not including claims)
- 3 page(s) Claims
- 1 page Abstract
- 3 page(s) Declaration For Patent Application and Power of Attorney - UNSIGNED
- 10 Sheet(s) of Drawings (INFORMAL)
- 1 page(s) PTO Form 1449 citing six (6) references
- ☒ Copy(ies) of six Cited References submitted

CLAIMS AS FILED (fees computed under \$1.9(f))

	Number		Number					Basic Fee
<u>For</u>	<u>Filed</u>		<u>Extra</u>		<u>Rate</u>			\$ <u>\$380.00</u>
Total Claims	10	-	0	x	\$9.00	=		\$ 0.00
		20						
Independent Claims	4	-3	1	x	\$ 39.00	=		\$ 39.00
<input type="checkbox"/>	Application contains one or more multiple dependent claims (total fee)							\$
<input checked="" type="checkbox"/>	Total fee for filing the patent application in the amount of							\$ 419.00

EXPRESS MAIL LABEL NO:

EM 263046 26045

Respectfully submitted,

Norman R. Klivans
Norman R. Klivans
Attorney for Applicants
Reg. No. 33,003

25 Metro Drive, Suite 700
San Jose, CA 95110
Phone 408 453-9200
Fax 408 453-7979

Austin, TX
Newport Beach, CA
San Francisco, CA

01/25/00
JCS66 U.S. PTO

00/25/2000
98064790836
OLD .S.N. 561-C-1

00/25/2000
98064790836
OLD .S.N. 561-C-1

METHOD AND APPARATUS FOR CARRYING DATA WITH A VIDEO
SIGNAL SO THAT THE DATA IS NOT RECORDED

John O. Ryan

James R. Holzgrafe

Mark A. Hollar

5

CROSS REFERENCE TO RELATED APPLICATION

This application claims priority to U.S.
provisional S.N. 60/117,273 filed Jan. 26, 1999,
10 incorporated herein by reference in its entirety.

FIELD OF THE INVENTION

This disclosure relates to video and more
specifically, to carrying data with a video signal so
15 the data is not recorded by standard video recorders.

BACKGROUND

The present inventors have recognized that it is
desirable to have the ability to modify video signals
20 so they carry additional information (data) which can
be received and used by a receiving device (e.g., a TV
set or display device but which, for security reasons,
is not recordable by standard video recorders. It is
believed that this problem of video data conveyance
25 without recordability has not been earlier recognized.
For instance, the VBI (vertical blanking interval) of
video signals is often used to carry (non-video) data
such as closed captioning, but a standard VHS type VCR
does record the VBI and also this data. However,
30 current digital video recorders do not record the VBI,
and it is believed that future digital recorders may
record only, for instance, part of the amplitude of the
VBI.

SUMMARY

There is disclosed here how to place data in that part of video signals which will generally survive transmission to a receiving device (e.g., transmission across a coaxial cable) but which will not be recorded by certain classes of current or standard video recording or storage devices. The data is used by non-recording devices, such as a compliant (compatible) TV set, for instance, for control or descrambling of the video signal. This approach is not limited to any particular video or TV standards.

BRIEF DESCRIPTION OF THE DRAWINGS

- Fig. 1A shows a generic system for play of scrambled analog video.
- Fig. 1B shows the generic system of Fig. 1A with recording which demonstrates the technical problem of problematic record/play devices.
- Fig. 1C shows a non-problematic recording system.
- Fig. 2 shows a prior art video waveform.
- Fig. 3 shows a modified vertical blanking interval (VBI) waveform.
- Fig. 4 shows another modified VBI waveform.
- Fig. 5 shows a conventional video encoder.
- Fig. 6 shows a modified video encoder.
- Fig. 7A shows a frequency spectrum for data placement.
- Figs. 7B and 7C show, respectively, an encoder and decoder to carry out the Fig. 7A method.
- Figs. 8A, 8B and 8C show sync modulation for data placement.

13 and viewed on display device 18. This is undesirable from the copyright holder's viewpoint and is activity which the present method discourages. In Fig. 1B, non-compliant (problematic) devices such as device 13 record the video and its vertical and/or horizontal blanking intervals. By recording the entire video stream including the descrambling keys designated in Fig. 1A as "scrambled analog video with data", device 13 is problematic to the copyright holder. The resulting video recording would then still be playable on a non-compliant (problematic) playback device 13 (a video recorder) and the played signal, shown in Fig. 1B as "scrambled video with data", would still be viewable on a compliant display device 18 as shown in Fig. 1B.

Hence this disclosure is directed to methods and apparatuses for concealing or hiding data (such as decryption or descrambling keys) in a video signal so that the hidden data is not recorded by such a problematic standard (non-compliant) video recorder. That is, only special (compliant) video receivers or recorders can extract and use the hidden data. This approach is not limited to high definition television (HDTV), as disclosed in the above-referenced co-pending application, but generally applies to situations using analog video transmission with digital video storage/recording. The method (in that co-pending application) for high definition television in which an indicator of the amount of wobble (active video time shifting for scrambling) is conveyed as hidden data by shifting in a predetermined fashion a location (in time) of an edge of a sync pulse is one example of this approach. The shifted sync pulse edge position represents an encoded version of the "hidden" data.

More generally, this approach is useful when it is desired to control use (e.g., recording or display) of the video signal upon receipt, and especially where the intent is that the control data (which is the "hidden" data) itself is not readily recordable by a problematic (non-compliant) standard video recorder.

As shown in Fig. 1C (similar to Fig. 1B), many types of current standard NTSC and PAL video record/play devices 12 blank the vertical and horizontal blanking intervals of a scrambled analog video signal output from a compliant video player or set top box (source) 14. This has the advantage of automatically thereby removing any associated hidden data located in the blanking interval. In the case shown in Fig. 1C, the scrambled analog video without scrambling data transmitted from the non-problematic record/play device (recorder) 12 to the display device 18 (TV set) is thereby unable to be descrambled. This is because the act of recording by device 12 removes the hidden data, which is the descrambling key. The goal of preventing recording has now been achieved.

Thus Fig. 1C shows generally the intended result in accordance with this disclosure - that the "hidden" data in the scrambled analog video is not recorded, so any recording of that video results in a video signal that then cannot be descrambled, due to lack of the essential descrambling key which was not recorded. This in effect prevents unauthorized recording. A problematic recording device 13 as in Fig. 1B in contrast, if available, would record the hidden data and thereby pass it along to the display device 18 upon playback.

Other suitable data hiding methods (in addition to placement in the blanking intervals) include (1) use of

- a high frequency carrier that is within the transmission bandwidth of the video cable but is outside the bandwidth of the recording device; and (2) phase modulation of the video signal's synchronization pulses, as described in the above-referenced compending application. Versions of all of the above methods may be applied to a chrominance signal as well as a luminance signal.

- For high definition television as opposed to NTSC/PAL video, the above-described use of any part of the blanking intervals to hide the data method may be inadequate since high definition video recorders have yet to be made commercially available. These recorders may be newly designed to record the active picture area and also the horizontal and vertical blanking intervals; this would include any conventionally encoded data in the vertical blanking intervals. These types of recorders may, for instance, record that part of the video signal (including blanking intervals) which goes from blanking (or black) level to peak white level, with some margin for overshoots. For instance, the CCIR-601 standard defines an 8-bit number system for carrying a digital component video signal in which the black level is represented by level 16 of 256 possible levels (10_{hex}) and white is represented by level 235 (EB_{hex}). In this case, levels from 1 to 254 (01_{hex} to FE_{hex}) are considered legal while levels 0 and 255 (00_{hex} and FF_{hex}) are reserved for the transmission of synchronization words.

- An analog representation of such a conventional (prior art) high definition video signal waveform is shown in Fig. 2 with the associated voltage levels indicated both as voltages (right margin) and as digital values (left margin). Fig. 2 shows one video

line (with no actual picture information) and the beginning of the next video line, thereby including two horizontal sync pulses.

One method for accomplishing the present data placement which would be operative with such standard video recorders is to locate the data signals in a part (in terms of amplitude) of the video signal which is generally reserved for the synchronization (sync) pulses, i.e., from blanking or black level down to the sync tip level. This is outside the amplitude range recorded by the above-described potential HD video recorders. For instance, a PAL video signal having blanking at 0 volts has sync tip at -300 millivolts. Or, for instance a 525 progressive, 720 progressive, 1080 interlaced or 1080 progressive analog component video signal (HDTV) conforms to the EIA-770 standard where blanking again is at 0V and the sync tips are at -300 mV as shown in Fig. 2. The standard tri-level sync pulses for HDTV are shown in Fig. 2.

This data hiding method is operative because a corresponding digital component video signal (e.g., conforming to CCIR-601, SMPTE 274M, 293M or 296M) is only able to represent those parts of the analog video signal down to approximately -48 mV (01 hex). (This presumes that at some point in the recording device, the video signal is digitized, of course.) Analog video levels below this are clipped when digitized (see Fig. 2) and so must necessarily be represented (in the digital domain) simply as the smallest possible value, 01 hex (8-bit). Thus information in the analog video signal below -48mV is lost when converted to a CCIR-601 type signal's digital representation.

Thus when this digital component video signal is converted back to analog form, it cannot create a

negative going pulse of sufficient amplitude. In most cases, in the digital video domain, it is the responsibility of a special integrated circuit to receive special synchronization words (values) and then to convert those into analog sync pulses with sufficient negative amplitude. Special sequences of FF_{hex} and 00_{hex} and an additional byte are often used to indicate the start of a line, field or vertical period or their end. Thus devices which convert the analog video to digital component video for internal recording or processing (e.g., certain video recorders), such as recording device 12 in Fig. 1C would inherently remove any hidden data encoded below the video blanking level. In particular, the data transmitted in this way is not generally available in a digital video format which would be available for manipulation by software. This inaccessibility by software considerably enhances a scrambling system.

For more detail see Fig. 3 which shows a waveform relating to that of Fig. 2 but showing multiple video lines including (upper part of figure) the vertical blanking interval of a conventional analog component video signal in accordance with the EIA-770.1 HDTV standard. The lower part of Fig. 3 shows (hatching) for that same waveform possible data hiding locations in accordance with this disclosure. The illustrated data hiding locations are all below blanking level and in the VBI. Fig. 3 is for the luminance component of a video signal. The data itself may be encoded in any convenient digital communications format consistent with the general representation shown in Fig. 4. Fig. 3 shows (hatched areas) possible locations in the VBI for the data packets shown in Fig. 4.

Thus Fig. 3 shows (lower part) how the vertical blanking interval is used to place data (hatched areas) that would not be recorded both because it is in the VBI (or HBI) and because it is below the blanking level. Some digital recorders reproduce the VBI, but none reproduce below blanking level.

Fig. 4 shows an example of the conventional Fig. 2 video line with data added in accordance with this disclosure and thus corresponds to one of the hatched areas in Fig. 3 with the proceeding and following sync pulses. In this case the line is in the VBI (see Fig. 3), and an example representing an 8-bit hidden data "payload" having the value of 0001 0100 (in binary) is shown as being alterations to the usual horizontal sync pulses present in this line of the VBI. Note that the digital representation of this line includes some values at the following hex values: 10, samples ramping down to 01, the remainder of the line at 01, samples ramping up to 10, 10. The analog signal levels below the digitization threshold (01 hex here) are clipped when digitized. The clipped values of course are thereby removed (not recorded by a standard recorder which carries out the digitizing).

Fig. 5 shows a block diagram of a conventional video encoder which may be an IC (integrated circuit) that converts Y, Cb, Cr, and sync multiplexed component video to Y, Pb, Cr component video. Such an encoder is used in a cable TV set top box or a video recorder. In some cases, these IC's have 6 digital-to-analog converters: composite (NTSC or PAL), S-Video (luminance and chrominance) and component video (Y/Pb/Pr or GBR). Fig. 5 shows a three component DAC (having digital-analog converters 40a, 40b, 40c) version.

The Fig. 5 digital encoder includes an illustrative input multiplexed component video bus 30 carrying the Y, Cb, Cr, and sync video components to the input port of demultiplexer and video sync generation circuit 34. The resulting output component video from demultiplexer 34 is subject to sync processor 38 which adds the sync component into the Y component. The resulting Y, Cb, Cr components are converted back to analog video components Y, Pb, Pr by respectively digital to analog converters 40a, 40b and 40c.

Fig. 6 shows a modified version of the Fig. 5 encoder with the functionality to add the encoded data as additional sync pulses in the VBI as shown in Fig. 4. The Fig. 6 encoder additionally includes a timing and video sync generation circuit 44. Circuit 44 includes shift registers 45a supplying serial data to the input terminal of a pulse shaping filter 45b. Circuit 44 in turn is coupled to data registers (memory) 48 which receives the data to be hidden on its input port 46, for insertion into the VBI portion of the video signal.

The complementary decoder (installed, for instance, in a compliant display device 18 in Fig. 1C) receives the modified video signal transmitted from the Fig. 6 encoder, extracts the added data signal, and separately supplies the video and the extracted data to, e.g., a descrambler, where the extracted data is used as the descrambling key.

The above-mentioned alternative method of placing data in a video signal using a high frequency carrier to "hide" the data can be understood with reference to Fig. 7A. In general, video recorders either use sampling of the video before recording or have some

limited bandwidth over which they are capable of recording analog information. Fig. 7A shows video signal frequency (horizontal axis) vs. signal amplitude (vertical axis). Generally, video transmission media
5 such as coaxial cable has a wider bandwidth than do standard recording devices.

As shown in Fig. 7A, the data is converted to a format in which all of the energy is concentrated in a higher region of the spectrum (indicated in Fig. 7A as
10 f_{data}) and transmitted at the high frequency band f_{data} to which the recorder cannot respond (record) because of its inherent data storage limitations. (Storage capacity is always a finite resource which must be conserved.) Thus, this allows for data to be presented
15 to the recorder over the transmission media so the recorder cannot record it. As described above, this is desirable for preventing recording of certain types of hidden data. Clearly, to be useful, a compliant video device, (e.g., a TV set) must be able to respond to the
20 video signal at carrier frequency f_{data} , and therefore must include appropriate data demodulators. Suitable demodulator techniques are well known.

Fig. 7B shows such an encoder suitable for carrying out the technique of Fig. 7A. This encoder
25 typically is present in the source device, such as a set top box or video player 14 of the type in Fig. 1C. Incoming video, which is standard video, is applied at terminal 52. Note that this encoder is typically used for each video component where the data is to be
30 inserted. Note that typically the added data would only be applied to one component of the video. Any necessary analog to digital or digital to analog conversion is not shown but is conventional.

The incoming video applied at terminal 52 is coupled at node 54 to conventional sync separator 56. The incoming video at node 54 is also applied to one input terminal of summer 78. The horizontal and vertical separated blanking pulses (in the digital domain) from sync separator 56 are then applied to the load/shift control terminal of conventional shift register 60. At the same time the incoming data (which is, e.g. a descrambling or decryption key), and which is generated externally by any one of a number of the usual methods, is applied as a parallel multi-bit signal to input terminal 62 which is the input terminal to a buffer 64.

The output signal from buffer 64 is then parallel data applied to the parallel in terminal of shift register 60. This input data, in response to the applied horizontal and vertical blanking pulses, is output as serial out data to one input terminal of a modulator 68. The other input terminal of modulator 68 is coupled to an oscillator 70, operating at frequency f_{data} . Modulator 68 is any suitable type of modulator, using for instance FM, AM, FSK, PSK, QPSK, etc. The modulated serial data output from modulator 68 is then applied to the other input terminal of summer 78 which outputs the combined input video and the above-band data on its output terminal 80.

The complementary decoder, which is typically present in a compliant display device (TV set) 18 of the type in Fig. 1C, is shown in Fig. 7C. The input video and data, which is essentially the same signal as output on terminal 80 of the Fig. 7B encoder, is applied at the input terminal 90. This video and data combined signal is then coupled to an optional low pass filter 96 and output as the output video at terminal

100. At the same time the input video at terminal 90 is applied to, at node 92, the input terminal of conventional sync separator 94. Again, any needed analog to digital or digital to analog conversion is not shown but is conventional. The input video is typically only one component of component video, but it is the component carrying the data.

The signals output from the sync separator 94 are the horizontal and vertical blanking pulses applied to the shift/load control terminal of shift register 112. At the same time, the input video and data signal at terminal 90 is applied to the input terminal of band pass filter 104, which outputs the filtered signal to the input terminal of demodulator 110. Demodulator 110 is complementary to modulator 68 in the encoder of Fig. 7B. The other input terminal of demodulator 110 is coupled to an oscillator 106 outputting signals at frequency f_{data} , which of course is predetermined to match that of the encoder.

The resulting serial data output from demodulator 110 is applied to the serial input terminal of shift register 112, which then outputs, in response to the control signals applied at its shift/load terminal, the output parallel data to the input terminal of buffer 118. Buffer 118 then outputs the separated output data needed for, e.g., descrambling on its terminal 120. Thus the compliant device has, respectively, the video on terminal 100 and the data (descrambling key) on terminal 120 and is able conventionally to perform the descrambling by whatever algorithm is associated with the scrambling technique.

While the above methods are for the most part modifications to the luminance video signal component, they also apply to the chrominance video signal

component. The chroma component (e.g., Cr, Cb) are baseband signals just as is the luma component. As such they can be modified or added to in the same ways as can the luma component. In particular, they contain

5 VBI and HBI portions; while they do not normally include sync pulses as such, nothing says they could not have pulses added. In addition, chrominance components could also have high frequency components added in a manner as shown in Fig. 7A.

- 10 Another method of conveying data in a "hidden" (non-recordable) manner is to modulate the position of the conventional sync pulse edges over time. Most digital video recorders do not record the horizontal synchronization signals; instead, they extract low
- 15 frequency timing information from them and regenerate and reinsert it upon playback. Creation of a phase modulated synchronization signal allows for information to be conveyed across the transmission media which is not recorded by the recording device. (This is the
- 20 method of the above-referenced co-pending application of Ryan, et al.)

- Fig. 8A shows a conventional tri-level sync pulse for HDTV, as also shown in Fig. 2. In Fig. 8B, the sync pulse of Fig. 8A is modified in accordance with
- 25 this disclosure so that the rising edge of the modified tri-level sync pulse remains in the same nominal position, while the falling edges that precede it and follow it are modulated - advanced in time. Similarly, in Fig. 8C, the two falling edges at the modified sync
- 30 pulse are delayed in time. A code system of this type can convey, using the modulated edge positions, the descrambling key to a suitable decoder to allow descrambling of the accompanying video signals, or to convey other information, using the differences between

these types of sync pulses. That is, the modulated edge positions represent the descrambling key value. This is the sync edge modulation technique disclosed in the above-referenced patent application.

- 5 Further modifications will be apparent to one of ordinary skill in the art in light of this disclosure. Therefore, the above description and illustrations should not be construed as limiting the scope of the invention, which is defined by the appended claims.

10

CLAIMS:

We claim:

1. A method of transmitting data in a video signal whereby the data is not recorded by particular
5 video recorders, comprising the acts of:
 providing the data;
 encoding the data;
 modifying a predetermined part of the video
 signal by inserting therein the encoded data; and
10 transmitting the modified signal;
 wherein the predetermined part of the
 modified signal is not recorded by the particular
 video recorders.
- 15 2. The method of Claim 1, wherein the
 predetermined part is in a blanking interval of the
 video signal.
3. The method of Claim 2, wherein the
20 predetermined part is also below a selected voltage
 level.
4. The method of Claim 1, wherein the
 predetermined part is above a predetermined frequency.
25
5. A method of receiving data encoded in a
 modified video signal wherein the data is not recorded
 by particular video recorders, comprising the acts of:
 receiving the modified video signal;
30 transmitting the video portion of the
 modified signal;
 extracting the encoded data from the modified
 video signal; and

decoding the extracted data.

6. An encoder for transmitting data encoded in a video signal whereby the data is not recorded by

5 particular video recorders, comprising:

an input video terminal for receiving a video signal;

an input data terminal for receiving the data;

10 a sync separator coupled to the input video terminal;

encoding circuitry coupled to the data input terminal and the sync separator, thereby to encode the data; and

15 a summer coupled to the encoding circuitry and the input video terminal, and outputting the video signal having a predetermined part thereof modified by the encoded data;

20 wherein the predetermined part of the modified video signal is not recorded by the particular video recorder.

7. The encoder of Claim 6, wherein the predetermined part is in a blanking interval of the
25 video signal.

8. The encoder of Claim 7, wherein the predetermined part is also below a selected voltage level.

30

9. The encoder of Claim 6, wherein the predetermined part is above a predetermined frequency.

10. A decoder for receiving data in a modified video signal wherein the data is not recorded by particular video recorders and is encoded into a predetermined portion of the video signal, comprising:

- 5 a video input terminal for receiving the modified video signal;
- a video output terminal coupled to the input terminal;
- 10 extraction circuitry having an input terminal coupled to the video input terminal and which extracts the data from the predetermined portion of the modified video signal; and
- a data output terminal coupled to the extraction circuitry to output the extracted data.

15

METHOD AND APPARATUS FOR CARRYING DATA WITH A VIDEO
SIGNAL SO THAT THE DATA IS NOT RECORDED

John O. Ryan

James R. Holzgrafe

Mark A. Hollar

5

ABSTRACT

10 A method and apparatus for modifying a video
signal to allow it to carry encoded data which is
detectable at a suitably compliant receiver but is not
recorded by a conventional video recorder. One
application is to carry a descrambling key to prevent
useful recording (but not viewing) of a scrambled
television signal since the key will not be recorded.

15

Figure 1A

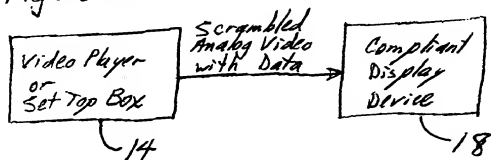
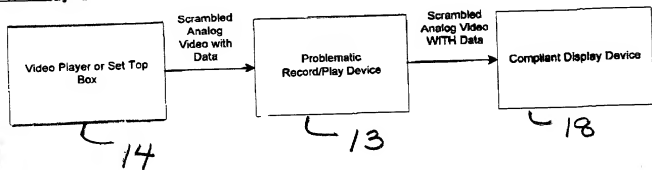


Figure 1B




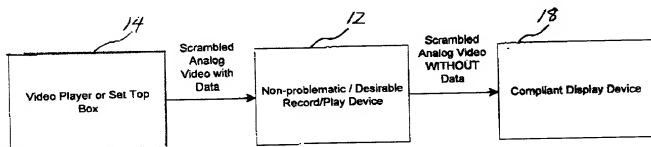


Figure 1 C

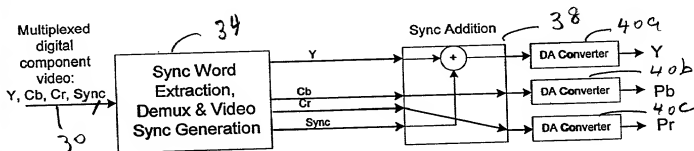

Figure

5 (Prior Art)

B:

DATE:

Z:

DATE:

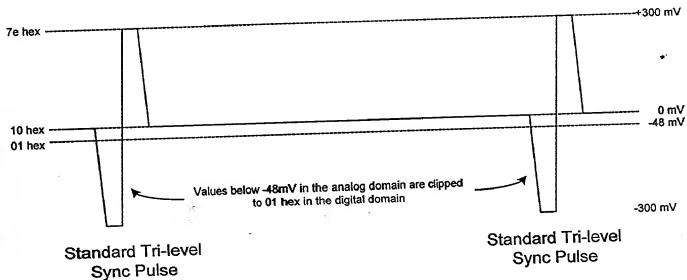


Figure 2

(Prior Art)

DATE:

BY:

DATE:

DATE:

BY:

DATE:

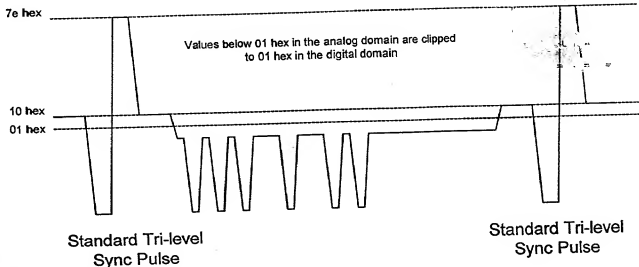


Figure 4

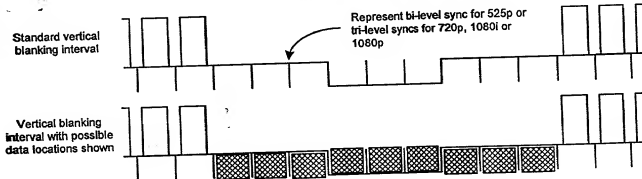


Figure 3

DATE:

2:

DATE:

DATE:

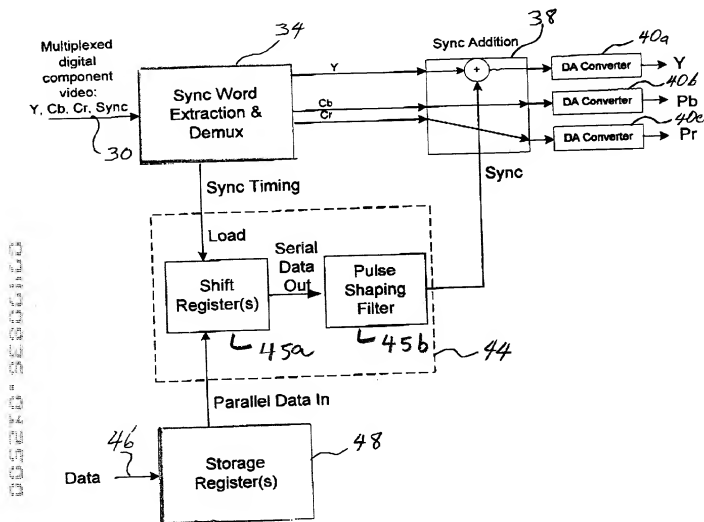


Figure 6

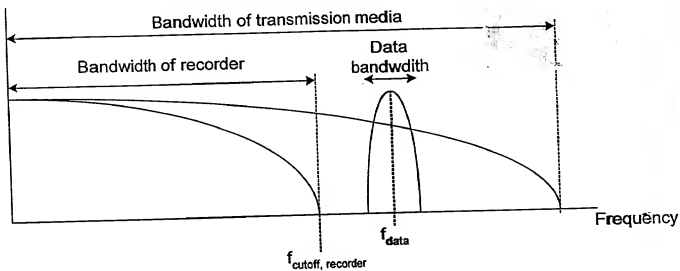


Figure 7-2A

DATE:

B:

WAGE

DATE:

2:

DATE:

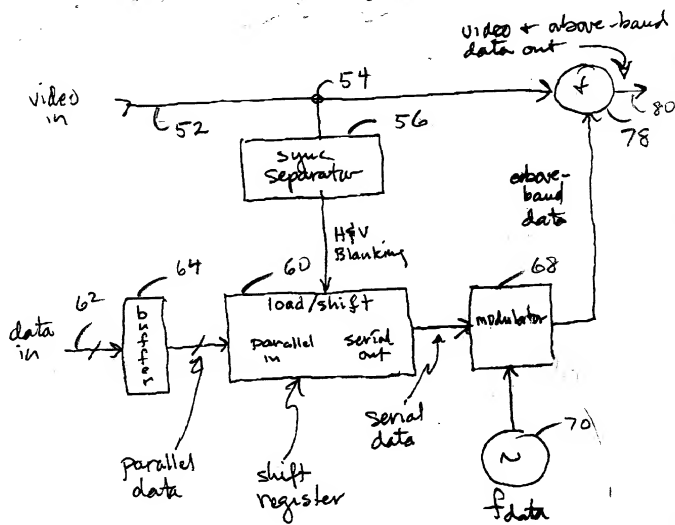


Figure 7B

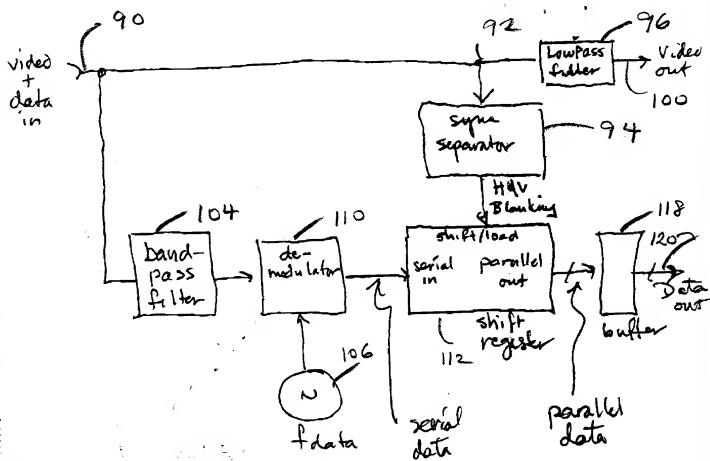


Figure 7C

Figure 8A. Standard Tri-level Sync Pulse




Figure 8B. Tri-level sync pulse with falling edges advanced in time





Figure 8C. Tri-level sync pulse with falling edges delayed in time



DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below adjacent to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of subject matter (process, machine, manufacture, or composition of matter, or an improvement thereof) which is claimed and for which a patent is sought by way of the application entitled

METHOD AND APPARATUS FOR CARRYING DATA IN A VIDEO SIGNAL SO THAT THE DATA IS NOT RECORDED

which (check) ☒ is attached hereto.

☐ and is amended by the Preliminary Amendment attached hereto.

☐ was filed on _____ as Application Serial No.

☐ and was amended on ____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information, which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119(a)-(d) of any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

Prior Foreign Application(s)			Priority Claimed	
Number	Country	Day/Month/Year Filed	Yes	No
N/A			<input type="checkbox"/>	<input type="checkbox"/>

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below:

Provisional Application Number	Filing Date
60/117,273	01/26/99

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) or PCT international application(s) designating the United States of America listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information, which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56, which became available between the filing date of the prior application(s) and the national or PCT international filing date of this application:

Application Serial No.	Filing Date	Status (patented, pending, abandoned)
N/A		

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the United States Patent and Trademark Office connected therewith:

Alan H. MacPherson (24,423); Brian D. Ogonowsky (31,988); David W. Heid (25,875); Norman R. Klivans (33,003); Edward C. Kwok (33,938); David E. Steuber (25,557); Michael Shenker (34,250); Stephen A. Terrile (32,946); Peter H. Kang (40,350); Ronald J. Meetin (29,089); Ken John Koestner (33,004); Omkar K. Suryadevara (36,320); David T. Millers (37,396); Kent B. Chambers (38,839); Michael P. Adams (34,763); Robert B. Morrill (43,817); Michael J. Halbert (40,633); Gary J. Edwards (41,008); James E. Parsons (34,691); Daniel P. Stewart (41,332); Philip W. Woo (39,880); John T. Winburn (26,822); Tom Chen (42,406); Fabio E. Marino (43,339); William W. Holloway (26,182); Don C. Lawrence (31,975); Marc R. Ascolese (42,268); Carmen C. Cook (42,433); David G. Dolezal (41,711); Roberta P. Saxon (43,087); Mary Jo Bertani (42,321); Dale R. Cook (42,434); Sam G. Campbell (42,381); Matthew J. Brigham (44,047); Hugh H. Matsubayashi (43,779); Patrick D. Benedicto (40,909); T.J. Singh (39,535); Shireen Irani Bacon (40,494); Rory G. Bens (44,028); George Wolken, Jr. (30,441); John A. Odozynski (28,769); Cameron K. Kerrigan (44,826); Kenneth C. Brooks (38,393); Paul E. Lewkowicz (Reg. No. 44,870); Theodore P. Lopez (44,881) and Frank Nguyen (39,790).

Please address all correspondence and telephone calls to:

Norman R. Klivans
Attorney for Applicant(s)
SKJVERVEN, MORRILL, MacPHERSON, FRANKLIN & FRIEL LLP
25 Metro Drive, Suite 700
San Jose, California 95110-1349

Telephone: 408-453-9200
Facsimile: 408-453-7979

I declare that all statements made herein of my own knowledge are true, all statements made herein on information and belief are believed to be true, and all statements made herein are made with the knowledge that whoever, in any matter within the jurisdiction of the Patent and Trademark Office, knowingly and willfully falsifies, conceals, or covers up by any trick, scheme, or device a material fact, or makes any false, fictitious or fraudulent statements or representations, or makes or uses any false writing or document knowing the same to contain any false, fictitious or fraudulent statement or entry, shall be subject to the penalties including fine or imprisonment or both as set forth under 18 U.S.C. 1001, and that violations of this paragraph may jeopardize the validity of the application or this document, or the validity or enforceability of any patent, trademark registration, or certificate resulting therefrom.

Full name of sole (or first joint) inventor: John O. Ryan

Inventor's Signature:	_____	Date:	_____
Residence:	Cupertino, California 95014		
Post Office Address:	22015 Creekside Court Cupertino, CA 95014	Citizenship:	U.S.

SCANNED BY

Full name of second inventor: James R. Holzgrafe

Inventor's Signature: _____ Date: _____

Residence: Morgan Hill, California 95038

Post Office Address: P.O. Box 911 Citizenship: U.S.

Morgan Hill, CA 95038

Full name of third inventor: Mark A. Hollar

Inventor's Signature: _____ Date: _____

Residence: Palo Alto, California 94306

Post Office Address: 3395 Birch Street Citizenship: U.S.

Palo Alto, CA 94306